

# Model BI-5152A



## 10mV/g Small Industrial Accelerometer

- Side exit
- +/- 500g dynamic range
- Connector or integral cable options
- Shear mode design reduces sensitivity to base strain and thermal transients
- Ground isolated



Actual Size

### Performance

Sensitivity (+/-5%)	10mV/g
Acceleration range	±500g peak
Frequency response (+/-5%)	6 - 2500Hz
Frequency response (+/-10%)	3 - 7000Hz
Frequency response (+/-3dB)	1.5 - 15000Hz

### Electrical



Voltage source	18 - 30VDC
Constant current source	2 - 10mA
Spectral noise @ 10Hz	200µg/√Hz
Spectral noise @ 100Hz	19µg/√Hz
Spectral noise @ 1000Hz	5µg/√Hz
Output impedance	<100 ohm
Bias output voltage	7 - 14VDC
Grounding	Case isolated Internally screened
Settling time	<2.5 seconds

### Environmental

Temperature range	-50 to +120 Deg C
Shock limit	5000g peak
Sealing	Welded, Hermetic

### Physical

Sensing element	PZT ceramic
Sensing structure	Shear mode
Weight	60 grams
Case Material	316L stainless steel
Mounting torque	3 to 6.5 Nm
Mounting hardware (metric)	M6 x 1 captive bolt
Mounting hardware (imperial)	1/4-28 captive bolt
Output connector	2 pin, Miniature
International compliance	CE

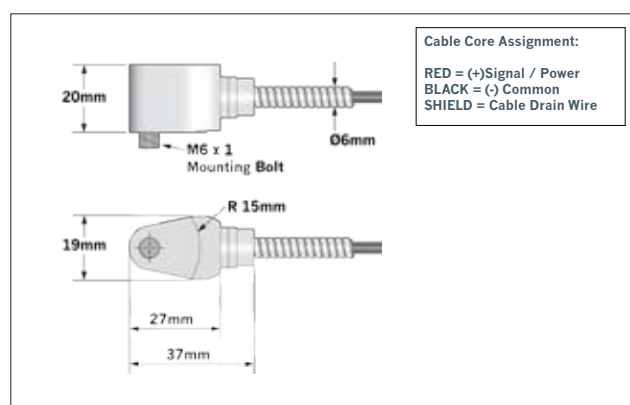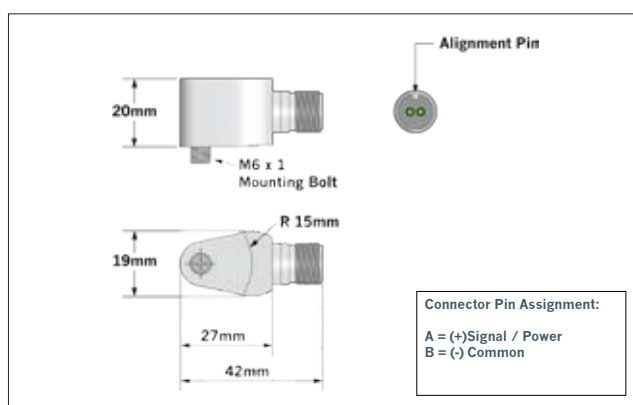

### Ordering Information

**Interface option**  
0 = Connector  
1 = Integral cable  
2 = Armoured cable

**Mounting bolt**  
0 = Metric (M6)  
1 = Imperial (1/4-28)

BI-5152A-□□-□□□□-□□

**Cable length**  
Metric (meters) = xxxM  
Imperial (feet) = xxxF

**Cable termination**  
00 = No termination  
01 = BNC Plug  
02 = BNC Jack (Skt)  
03 = MIL-C-5015 termination