



AT/08 Ultra Miniature Piezoelectric Triaxial Accelerometer


0.4pC/g nom. 1.2gm 200°C Max Temp

An Ultra-lightweight miniature triaxial vibration transducer comprising of three charge output piezo-electric accelerometer elements mounted orthogonally within a stainless steel block. It makes use of the independent shear plate sensing elements, ensuring a rugged and repeatable triaxial measurement under the most extreme conditions. This design will outperform single element devices. The AT/08 uses high temperature piezo-ceramics as standard to ensure thermal stability.


The accelerometer features a 1m integral cable which terminates with the industry standard 1/4-28 UNF socket. It can also be supplied with three 10/32 microdot sockets labelled X, Y and Z.

Extension cable assemblies of any length can be provided breaking out to 3 BNC plugs. Standard sensitivity is nominally 0.4pC/g. The AT/08 triaxial PE accelerometer can also be specified as a low outgassing accelerometer


Temperature Response

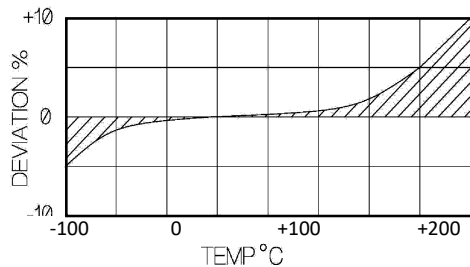

Typical Frequency Response

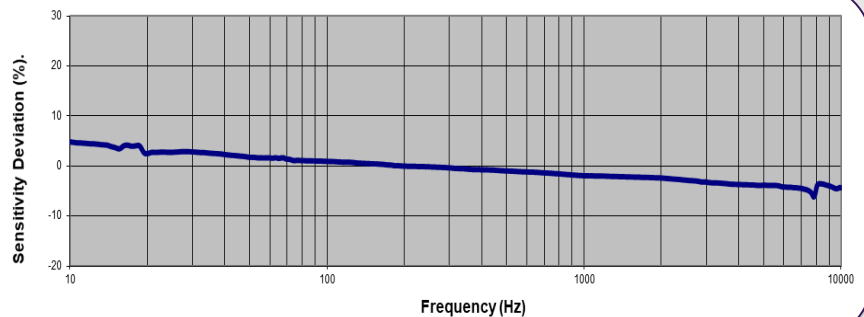

	Metric	Imperial
Charge Sensitivity @ 20°C nom.	0.04pC/(m/s ²)	0.4pC/g
Resonant Frequency	58kHz	
Cross Axis Error	≤5%	
Typical Frequency response ±5%	1Hz - 11kHz	
±10%	0.7Hz - 12kHz	
Temperature Range	-50/ +200°C	-58/ +392°F
Base Strain Sensitivity	0.01g/μ strain	
Charge sensitivity deviation (20°C / 68°F)	-5% @ -50°C +5% @ +125°C	-5% @ -58°F +10% @ +392°F
Capacitance	25/420 pF	
Max Shock g pK., rise time μ sec	98100m/s ² , 30	10000g, 30
Case Material	Stainless steel	
Mounting	Adhesive	
Weight	1.2g	0.04oz
Size	7 x 7 x 5.66mm	0.27 x 0.29 x 0.22in
Case Seal	Welded	
Connector	1m low noise Integral Cable with 1/4-28 UNF sockets or 10-32 UNF Microdots	3.28ft low noise Integral Cable with 1/4-28 UNF sockets or 10-32 UNF Microdots

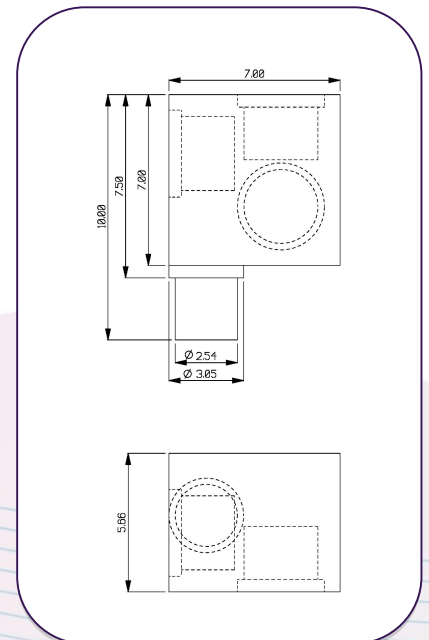

Please note: For information and reference only. Data should not be used as pass / fail criteria for calibration purposes

DJB Instruments (UK) Ltd

Finchley Avenue,
Mildenhall, Suffolk IP28 7BG

A UK company with UK-based manufacturing, assembly and calibration in-house.

Tel +44 (0)1638 712 288
Email sales@djbinstruments.com
Web www.djbinstruments.com

DJB Iss.3.2020



ISO 9001 – 00025363