

# A/124/TE.XX

## Mono-axial IEPE accelerometer

IEPE, Top Entry M3.5 Connector, Adhesive Mount



### KEY FEATURES

- ✓ Titanium case
- ✓ 1.8 grams
- ✓ 5 standard sensitivity options; 1mV/g to 100mV/g

### DEVICE / FAMILY OPTIONS

- ✓ A/124/TE.XXET - Extended temperature variant to 165°C
- ✓ A/124/TE.XXT - Transducer Electronic Datasheet (TEDS)
- ✓ Extended low & high frequency calibration
- ✓ Custom sensitivities available on request
- ✓ Alternative/additional stud options

A/124/E Side Entry M3.5 connector, adhesive mount

A/124/TE Top Entry M3.5 connector, adhesive mount


A/124/E-1 Side Entry M3.5 connector, ceramic isolated adhesive mount

A/124/TE-1 Top Entry M3.5 connector, ceramic isolated adhesive mount

### TYPICAL CABLE OPTIONS

- ✓ KP/BC1/S11/30 - M3.5 to BNC, FEP jacket, co-axial, 3 meters
- ✓ KP/M1/S11/30 - M3.5 to Microdot Plug, FEP jacket, co-axial, 3 meters
- ✓ KP/MS1/S11/30 - M3.5 to Microdot Socket, FEP jacket co-axial, 3 meters
- ✓ Other options and lengths available

### A/124/TE ACCELEROMETER DIMENSIONS

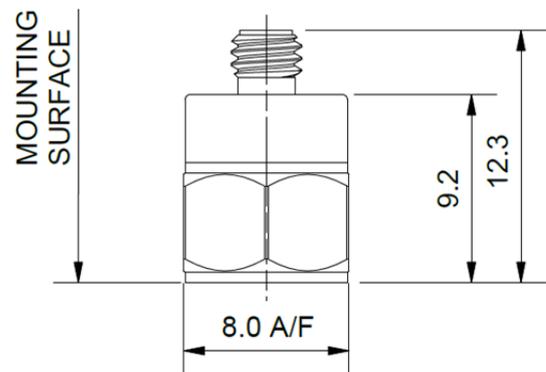


All measurements in millimeters (mm)

# TECHNICAL SPECIFICATIONS


Performance	A/124/TE.1	A/124/TE.5	A/124/TE.10	A/124/TE.30	A/124/TE.100
<b>Voltage Sensitivity (<math>\pm 10\%</math>)</b>	1mV/g	5mV/g	10mV/g	30mV/g	100mV/g
<b>Measurement Range</b>	$\pm 5000g$	$\pm 1000g$	$\pm 500g$	$\pm 160g$	$\pm 50g$
<b>Frequency Response (<math>\pm 5\%</math>)</b>	1Hz to 11kHz				
<b>Frequency Response (<math>\pm 10\%</math>)</b>	0.7Hz to 13kHz				
<b>Resonant Frequency</b>	$\geq 70kHz$				
<b>Cross Axis Error</b>	$\leq 5\%$				
<b>Maximum Shock Limit</b>	5000g				
<b>Non-linearity (% FS)</b>	$\leq 1\%$				
<b>Base Strain Sensitivity</b>	$\leq 0.001g/\mu\epsilon$				
<b>Broadband Resolution</b>	0.002grms (100mV/g)				
<b>Electrical Characteristics</b>					
<b>Supply Voltage</b>	15V to 35V DC				
<b>Supply Current</b>	2mA to 20mA (max 2mA above 125°C)				
<b>Bias Voltage</b>	10V to 14V DC				
<b>Output Impedance</b>	$\leq 100\Omega$				
<b>Base Isolation Impedance</b>	N/A				
<b>Settling Time Constant</b>	<5 seconds				
<b>Physical</b>					
<b>Case Material</b>	Titanium				
<b>Connector</b>	Top Entry, M3.5				
<b>Mounting</b>	Adhesive				
<b>Recommended Mounting Torque</b>	N/A				
<b>Weight</b>	1.8 grams				
<b>Size (metric)</b>	8mm (A/F) x 12.3mm				
<b>(imperial)</b>	0.31" (A/F) x 0.48"				
<b>Environmental</b>					
<b>Temperature Range (°C)</b>	-50°C to +125°C (Extended temperature option to 165°C)				
<b>(°F)</b>	-58°F to +257°F (Extended Temperature option to 329°F)				
<b>Total Mass Loss (TML)</b>	<0.1%				

## TYPICAL FREQUENCY RESPONSE

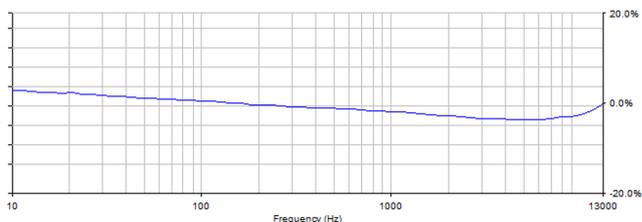

## TYPICAL THERMAL RESPONSE

Response shows performance of piezoelectric sensing element, including beyond the stated operating limits.

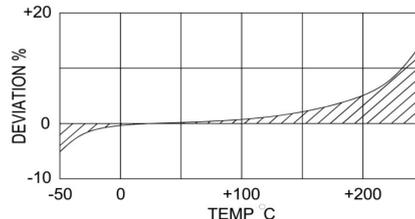

## TYPICAL SPECTRAL NOISE (100mV/g)

1 Hz - 345  $\mu g/\sqrt{Hz}$   
 10 Hz - 42.8  $\mu g/\sqrt{Hz}$   
 100 Hz - 11.2  $\mu g/\sqrt{Hz}$   
 1 kHz - 5.67  $\mu g/\sqrt{Hz}$   
 10 kHz - 5.2  $\mu g/\sqrt{Hz}$

DJB INSTRUMENTS UK LIMITED

e: sales@djbinstruments.com

t: +44 (0) 1638 712288

w: djbinstruments.com



ISO 9001 - 00025363



SPECIFICATIONS MAY BE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

ALL DEVICES CALIBRATED IN ACCORDANCE WITH BS ISO 16063-21:2003. ALL DEVICE CALIBRATIONS ARE UKAS TRACEABLE.