



IH/20

Impact Hammer

0.25mV/N Sensitivity, BNC Connector, 20000N pk Measurement Range

TECHNICAL SPECIFICATIONS

Performance

Sensitivity ($\pm 10\%$)	0.25mV/N
Measurement Range	20000N pk
Non-linearity (% FS)	$\leq 1\%$
Resolution	450mN rms
Resonant Frequency	$\geq 45\text{kHz}$
Low Frequency	0.5Hz


Electrical Characteristics

Supply Voltage	18 to 28V DC
Supply Current	2 to 10mA
Bias Voltage	10 to 14V DC
Output Impedance	$\leq 100\Omega$

Physical

Head Weight	445g
Head Diameter	32mm
Hammer Length	350mm
Hammer Weight (total)	0.9kg
Connector	BNC

DIMENSIONS

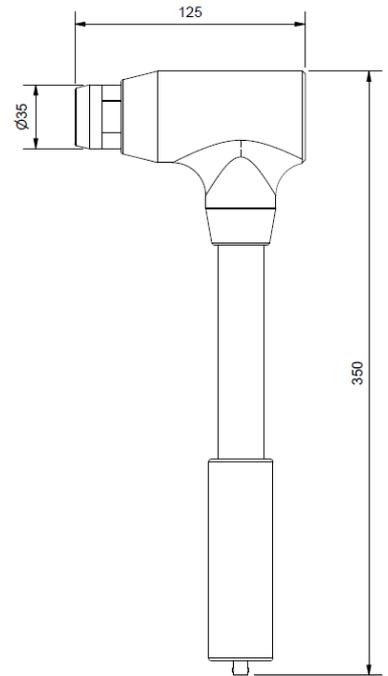

All measurements in millimeters (mm)
Not to scale

INCLUDED WITH DEVICE

- ✓ 3 interchangeable tips

Soft Medium Hard



- ✓ 2 metre BNC to BNC cable

- ✓ Other cable options and lengths available



ISO 9001 – 00025363



DEVICE OPTIONS

IH/01	25mV/N Sensitivity, BNC Connector, 200N pk Measurement Range
IH/01-50	100mV/N Sensitivity, M5 Connector, 50N pk Measurement Range
IH/02	2.5mV/N Sensitivity, BNC Connector, 2kN pk Measurement Range
IH/05	1mV/N Sensitivity, BNC Connector, 5kN pk Measurement Range
IH/10	0.5mV/N Sensitivity, BNC Connector, 10kN pk Measurement Range
IH/20	0.25mV/N Sensitivity, BNC Connector, 20kN pk Measurement Range
IH/50	0.1mV/N Sensitivity, BNC Connector, 50kN pk Measurement Range

DJB INSTRUMENTS UK LIMITED

e: sales@djbinstruments.com

t: +44 (0) 1638 712288

w: djbinstruments.com



SPECIFICATIONS MAY BE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

ALL DEVICES CALIBRATED IN ACCORDANCE WITH BS ISO 16063-21:2003. ALL DEVICE CALIBRATIONS ARE UKAS TRACEABLE.